


Purger II™

2-24" (51-610mm)

The Purger™ Series pig is a tough, all urethane pipeline pig that requires absolutely no maintenance and is an excellent pig for product evacuation. The difference between the Purger I™ and Purger II™ is the added cup to the front of the pig for added effectiveness.

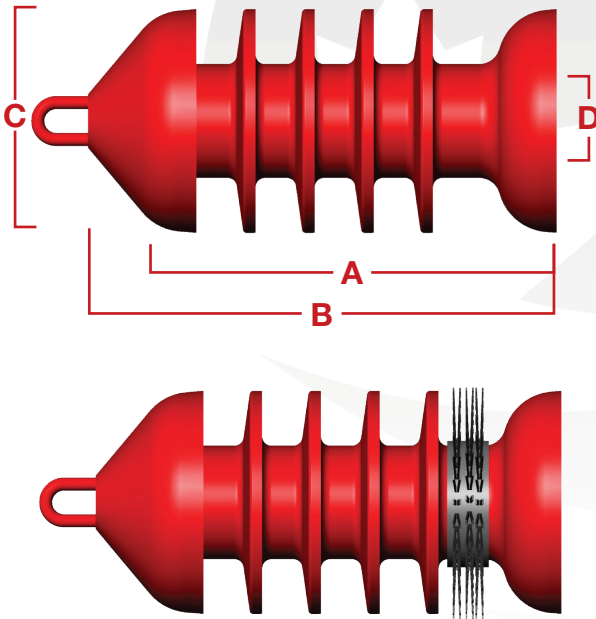

Size	A	B	C	D	Part #
2"	4.250	5.375	2.250	0.500	71-0285-02
3"	6.750	8.375	3.375	1.000	71-0285-03
4"	7.500	9.500	4.375	1.250	71-0285-04
6"	11.500	15.000	6.375	1.500	71-0285-06
**6"	11.500	15.000	6.710	1.500	71-0285-067
8"	15.500	19.250	8.625	3.000	71-0285-08
10"	18.250	22.000	10.625	3.875	71-0285-10
12"	22.000	26.500	12.500	4.750	71-0285-12
14"	24.000	31.000	14.250	5.750	71-0285-14
16"	24.500	33.000	16.375	6.750	71-0285-16
18"	27.000	36.000	18.000	8.750	71-0285-18
20"	30.375	39.000	20.000	7.875	71-0285-20
22"	33.625	43.000	22.000	9.000	71-0285-22
24"	36.750	46.000	24.000	9.875	71-0285-24

** Designed for thin wall applications

*Part numbers shown are for 85 Durometer (62 and 72 also available)

Designed to negotiate 1.5D or greater bends.

Features & Benefits:

- Lightweight.
- Improved sealing as hollow core allows pressure to expand the body.
- Multiple seals.
- Standard hollow core for a transmitter.

Options Available:

- Solid core.
- Variety of durometers.
- Wrap brushes. See page 5-22.
- Magnets. Trip magnets available for sizes 4"-36". See page 6-3.
- Rattler for 12" – 36" sizes only.
- Custom lengths available on request.

60-63 DUROMETER
 Very soft and pliable

70-75 DUROMETER
 Somewhat firm, but quite flexible

80-85 DUROMETER
 Firm with fair flexibility. Most common for solid-cast pigs