


Purger I™

2-36" (51-914mm)

The Purger™ Series pig is a tough, all urethane pipeline pig that requires absolutely no maintenance and is an excellent pig for product evacuation. The Purger I™ is also an efficient batching, cleaning and displacement pig. Its multi-disc design ensures that sealing elements are always centered in the pipeline, resulting in consistent wear over time.

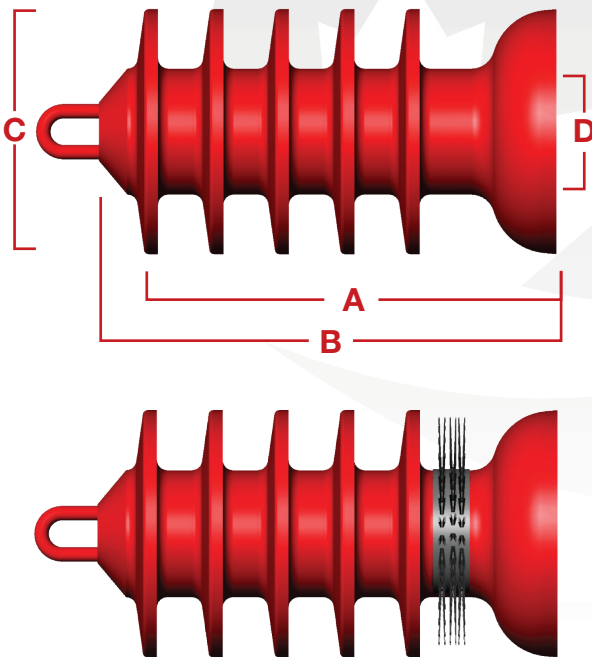

Size	A	B	C	D	Part #
2"	4.500	5.000	2.250	0.500	71-0185-02
3"	6.750	7.500	3.375	1.000	71-0185-03
4"	7.500	8.500	4.375	1.250	71-0185-04
6"	11.500	13.250	6.375	1.500	71-0185-06
**6"	11.500	13.250	6.710	1.500	71-0185-067
8"	15.250	17.000	8.625	3.000	71-0185-08
10"	17.500	19.750	10.625	3.875	71-0185-10
12"	20.500	23.000	12.500	4.750	71-0185-12
14"	23.500	26.000	14.250	5.750	71-0185-14
16"	25.750	28.500	16.375	6.750	71-0185-16
18"	29.000	35.000	18.000	7.750	71-0185-18
20"	29.500	33.750	20.000	7.875	71-0185-20
22"	32.750	37.250	22.000	9.000	71-0185-22
24"	35.750	39.750	24.000	9.875	71-0185-24
30"	44.000	52.000	30.000	12.875	71-0185-30
36"	48.500	61.000	36.000	18.625	71-0185-36

** Designed for thin wall applications

*Part numbers shown are for 85 Durometer (62 and 72 also available)

Designed to negotiate 1.5D or greater bends.

Features & Benefits:

- Lightweight.
- Improved sealing as a hollow core allows pressure to expand the body.
- Multiple seals.
- Standard hollow core for a transmitter.

Options Available:

- Solid core.
- Variety of durometers.
- Wrap brushes. See page 5-22.
- Magnets. Trip magnets available for sizes 4"-36".
- Rattler for 12" – 36" sizes only.
- Custom lengths available on request.

60-63 DUROMETER
Very soft and pliable

70-75 DUROMETER
Somewhat firm, but quite flexible

80-85 DUROMETER
Firm with fair flexibility. Most common for solid-cast pigs